


## BENEFITS

- Capacitive Sensor
- Variable Flow Rate
- Diagnostic LED
- Submersible in Drain Pans
- Built-in Operation Tracking
- Ultra-quiet Operation
- Up to 46 kw / 157,000 Btu/h

*Tranquil-D*

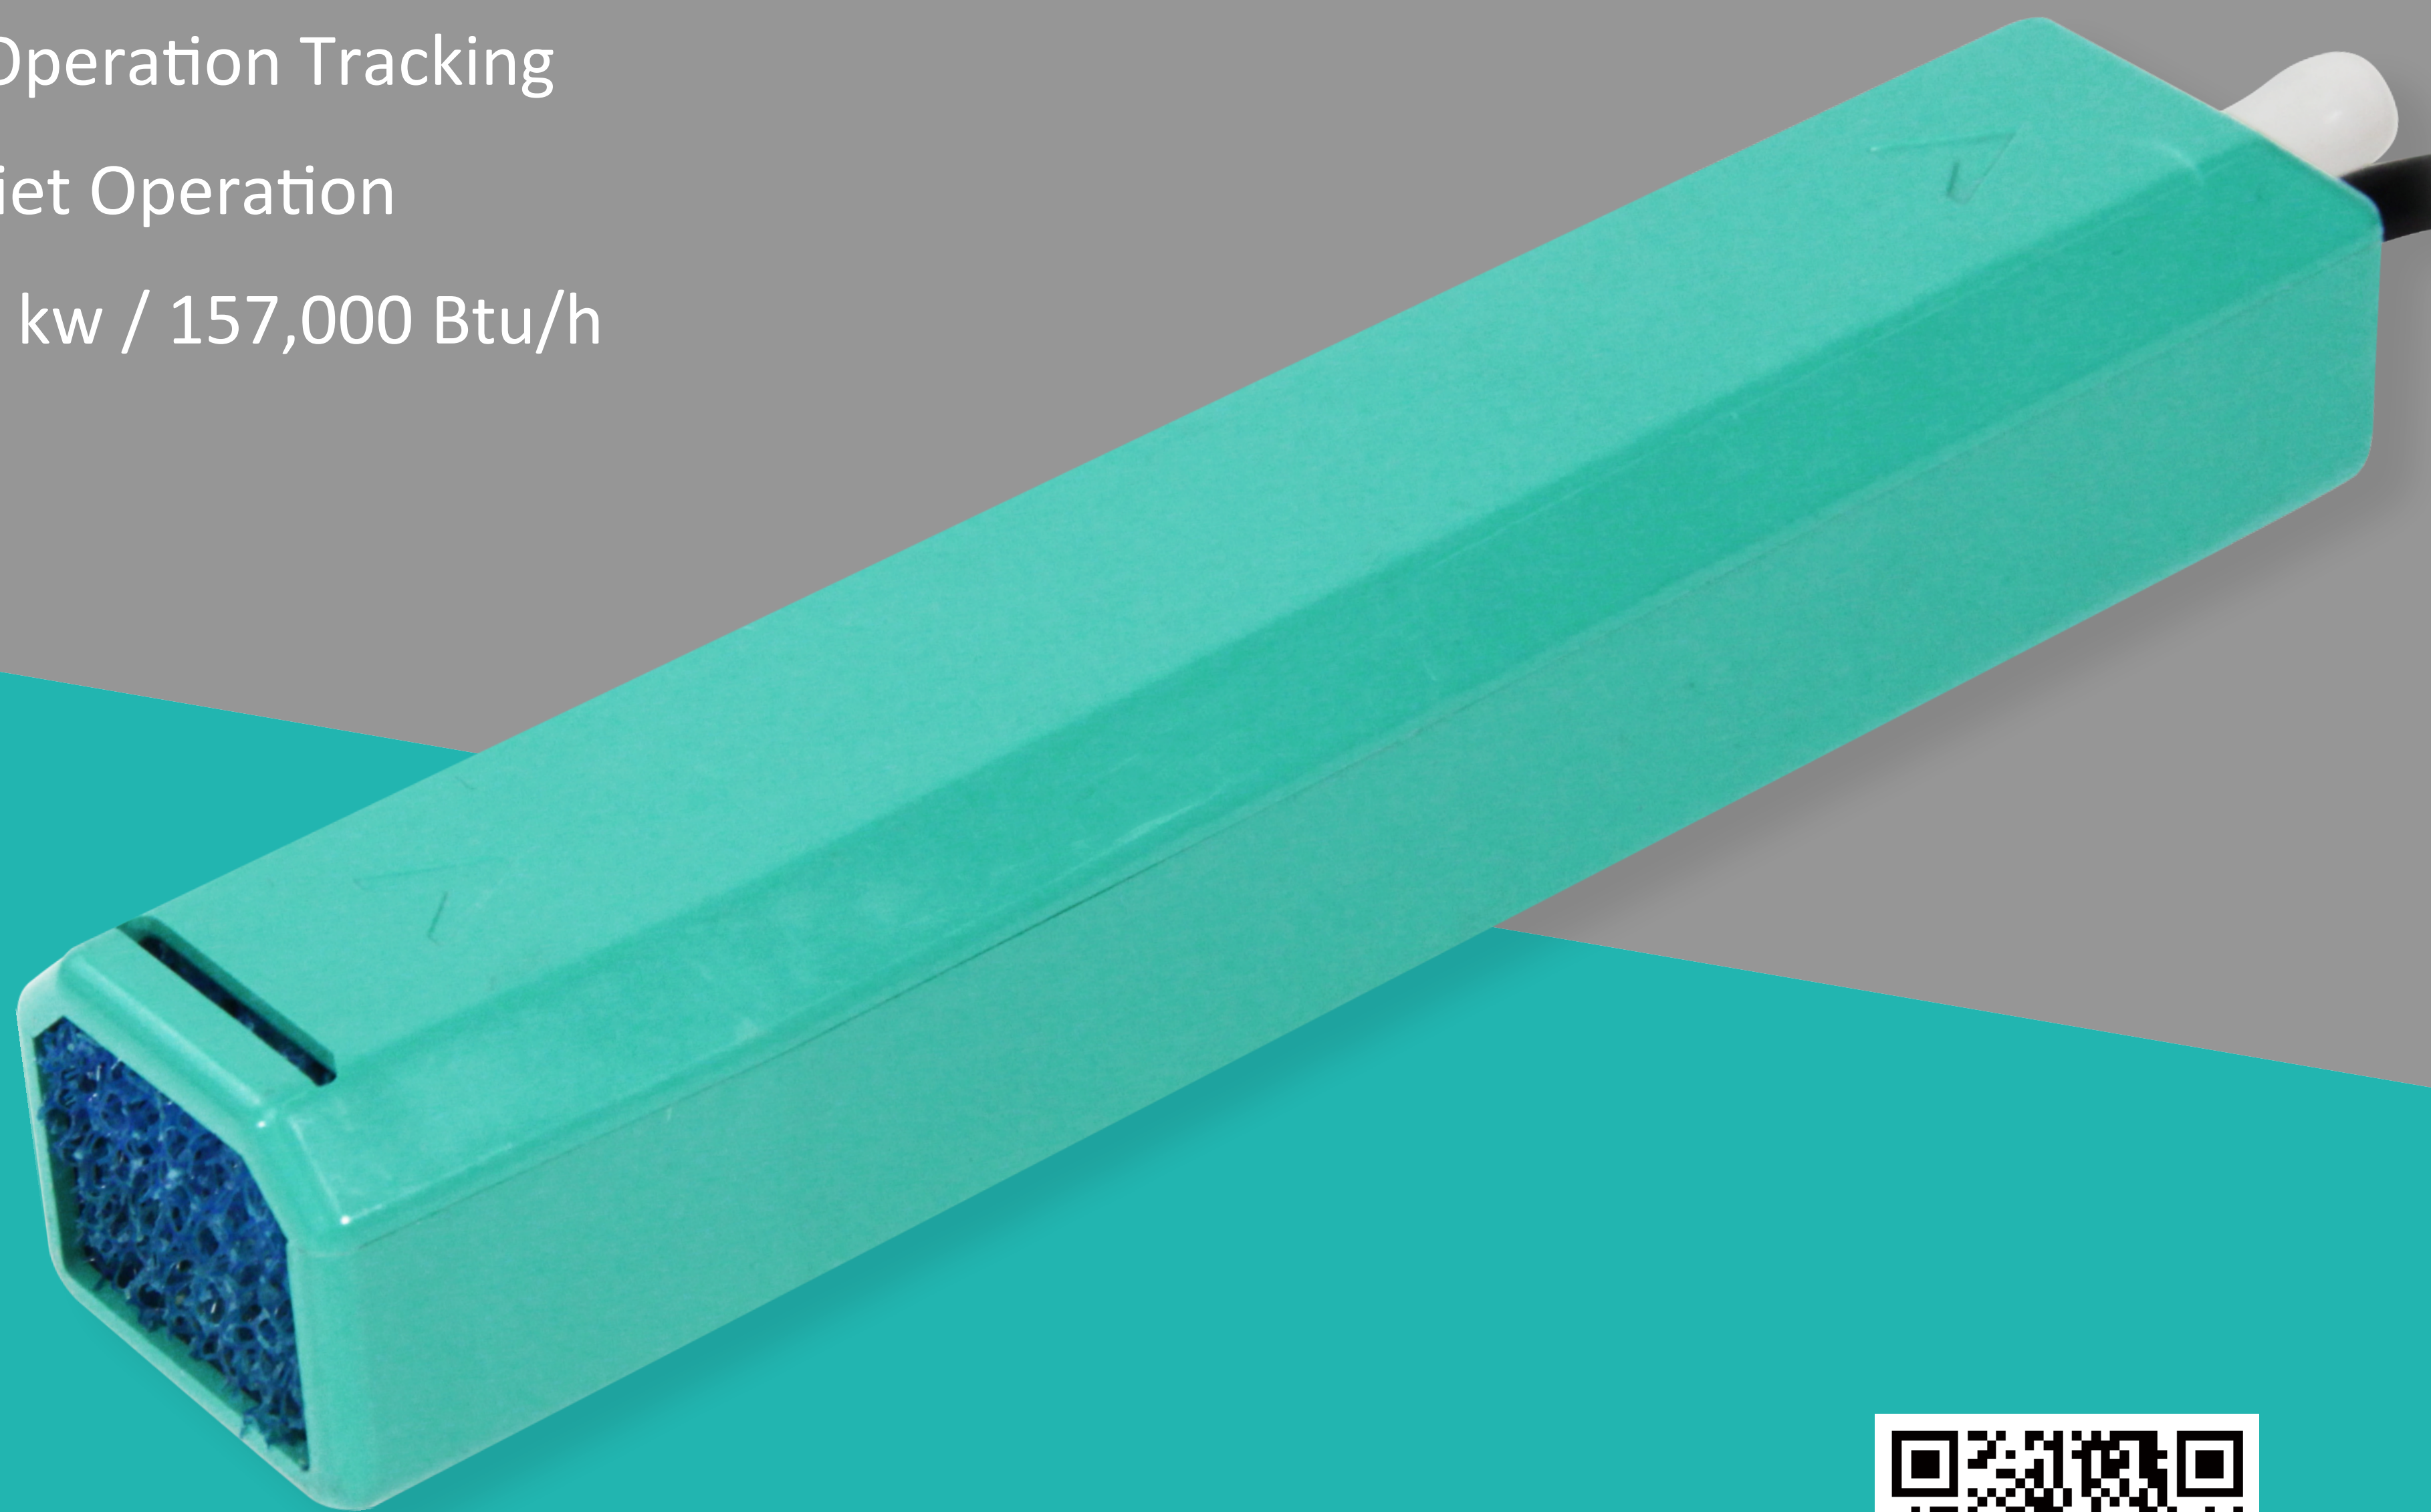

LEARN MORE  
ABOUT US





## Tranquil-D




Max. flow 40 L/h (10.6GPH)



Sound level < 19 dB(A) @ 1M (3.3ft)





Max. discharge head 20 M (65.6ft)

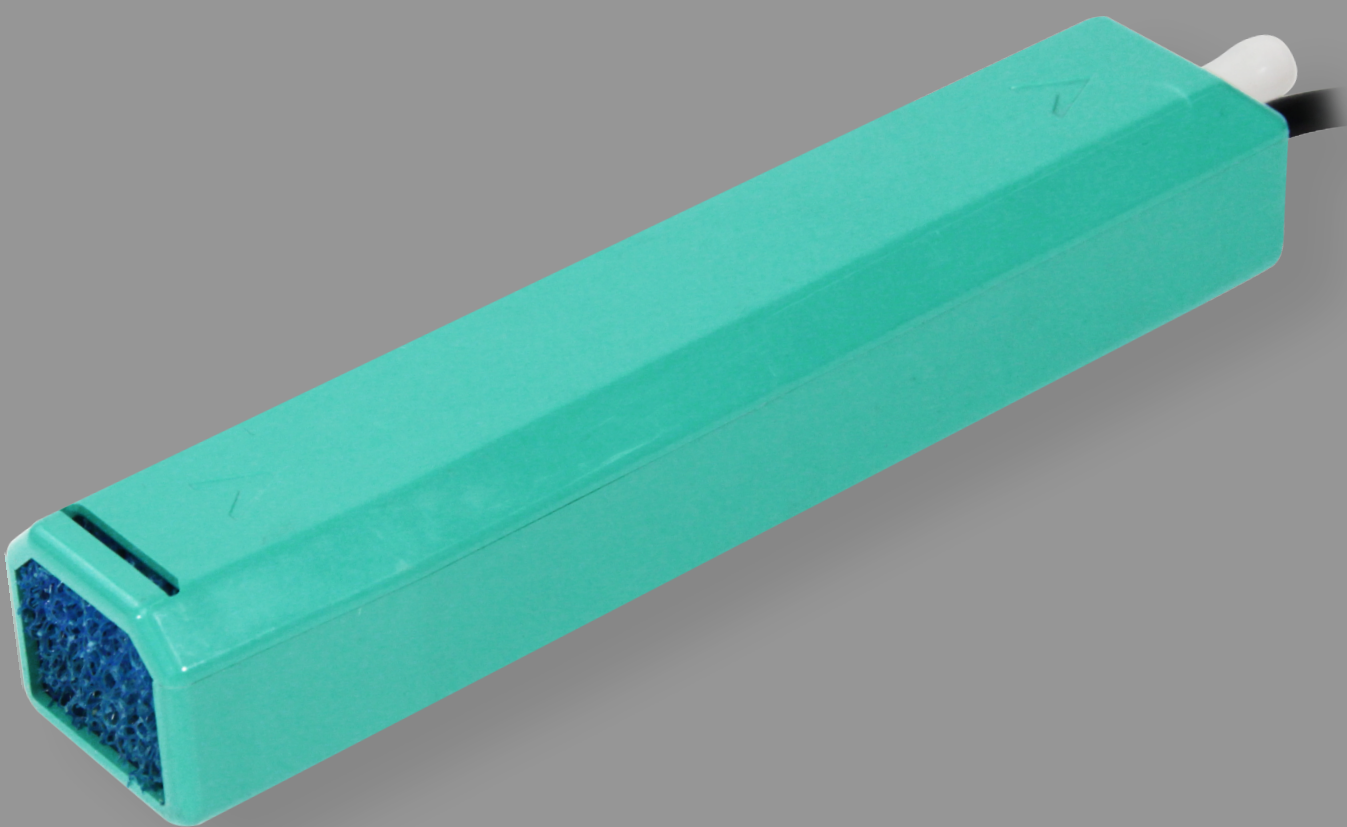

### Technical Data

Power supply	100-240V AC 50/60Hz <4W
Max. flow	40 (10.6GPH), range from 20-40L/H (5.3-10.6GPH)
Sound level	<19dB(A)@1M(3.3ft)
Max. discharge head	20 M (65.6ft)
Max. suction lift	2 M (6.6ft)
Max. unit output	46 kw / 157,000 Btu/h
Safety switch	3A Normally closed
Max. water temperature	40 °C
Discharge tube	6mmID
Class	II appliance
Protection	IP68
L×W×H	176mm × 34mm × 41mm

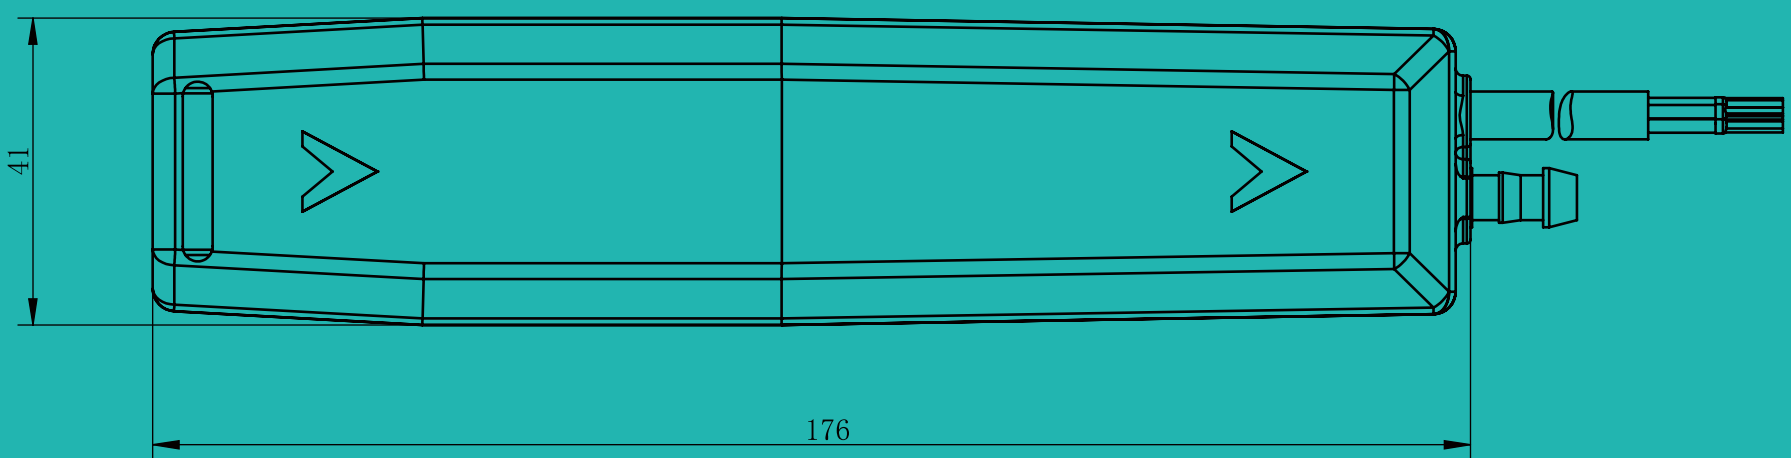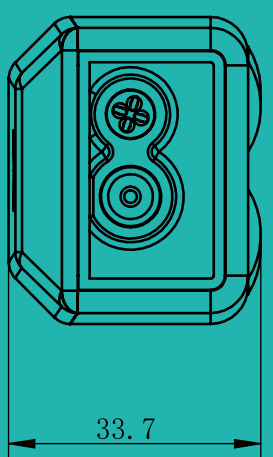

LEARN MORE  
ABOUT US