

BENEFITS

- Capacitive sensor
- Variable flow rate
- Diagnostic LED
- Built-in Operation Tracking
- Simple Installation
- Ultra-quiet operation low to 16dB
- Up to 46 kw / 157,000 Btu/h

Tranquil-X

Refcenter®

LEARN MORE
ABOUT US



Tranquil-X



Max. flow 40 L/h (10.6GPH)



Sound level 16 dB(A) @ 1M (3.3ft)





Max. discharge head 20 M (65.6ft)



Technical Data

Power supply	100-240V AC 50/60Hz <4W
Max. flow	40 (10.6GPH), range from 20-40L/H (5.3-10.6GPH)
Sound level	16dB(A)@1M (3.3ft)
Max. discharge head	20 M (65.6ft)
Max. suction lift	2 M (6.6ft)
Max. unit output	46 kw / 157,000 Btu/h
Safety switch	3A Normally closed
Max. water temperature	40 °C
Discharge tube	6mmID
Class	II appliance
Protection	Fully potted, IP-45
L×W×H	281mm × 55mm × 69mm

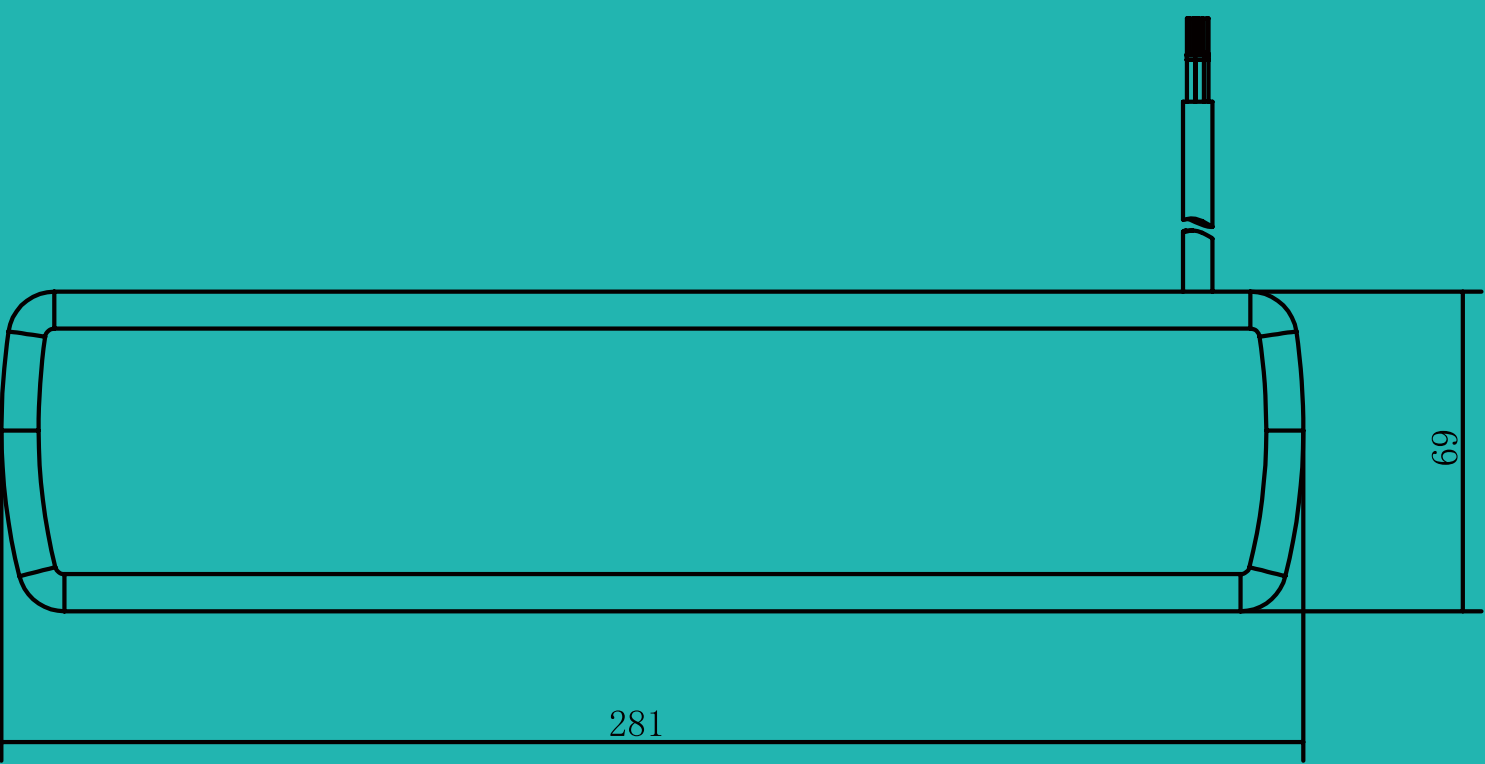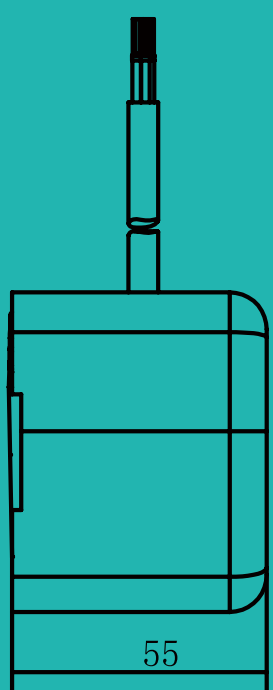

LEARN MORE
ABOUT US